Z80™-CTC
Z80A™-CTC

R9.36

Product Specification

OCTOBER 1977

The Zilog Z80 product line is a complete set of microcomputer components, development systems and support software. The Z80 microcomputer component set includes all of the circuits necessary to build high-performance microcomputer systems with virtually no other logic and a minimum number of low cost standard memory elements.

The Z80-Counter Timer Circuit (CTC) is a programmable, four channel device that provides counting and timing functions for the Z80-CPU. The Z80-CPU configures the Z80-CTC's four independent channels to operate under various modes and conditions as required.

Structure

- N-Channel Silicon Gate Depletion Load Technology
- 28 Pin DIP
- Single 5 volt supply
- Single phase 5 volt clock
- Four independent programmable 8-bit counter/16-bit timer channels

Features

- Each channel may be selected to operate in either a counter mode or timer mode.
- Programmable interrupts on counter or timer states.
- A time constant register automatically reloads the down counter at zero and the cycle is repeated.
- Readable down counter indicates number of counts-to-go until zero.
- Selectable 16 or 256 clock prescaler for each timer channel.
- Selectable positive or negative trigger may initiate timer operation.
- Three channels have zero count/timeout outputs capable of driving Darlington transistors.
- Daisy chain priority interrupt logic included to provide for automatic interrupt vectoring without external logic.
- All inputs and outputs fully TTL compatible.

CTC Architecture

A block diagram of the Z80-CTC is shown in figure 1. The internal structure of the Z80-CTC consists of a Z80-CPU bus interface, internal control logic, four counter channels, and interrupt control logic. Each channel has an interrupt vector for automatic interrupt vectoring, and interrupt priority is determined by channel number with channel Ø having the highest priority.

The channel logic is composed of 2 registers, 2 counters and control logic as shown in figure 2. The registers include an 8-bit time constant register and an 8-bit channel control register. The counters include an 8-bit readable down counter and an 8-bit prescaler. The prescaler may be programmed to divide the system clock by either 16 or 256.

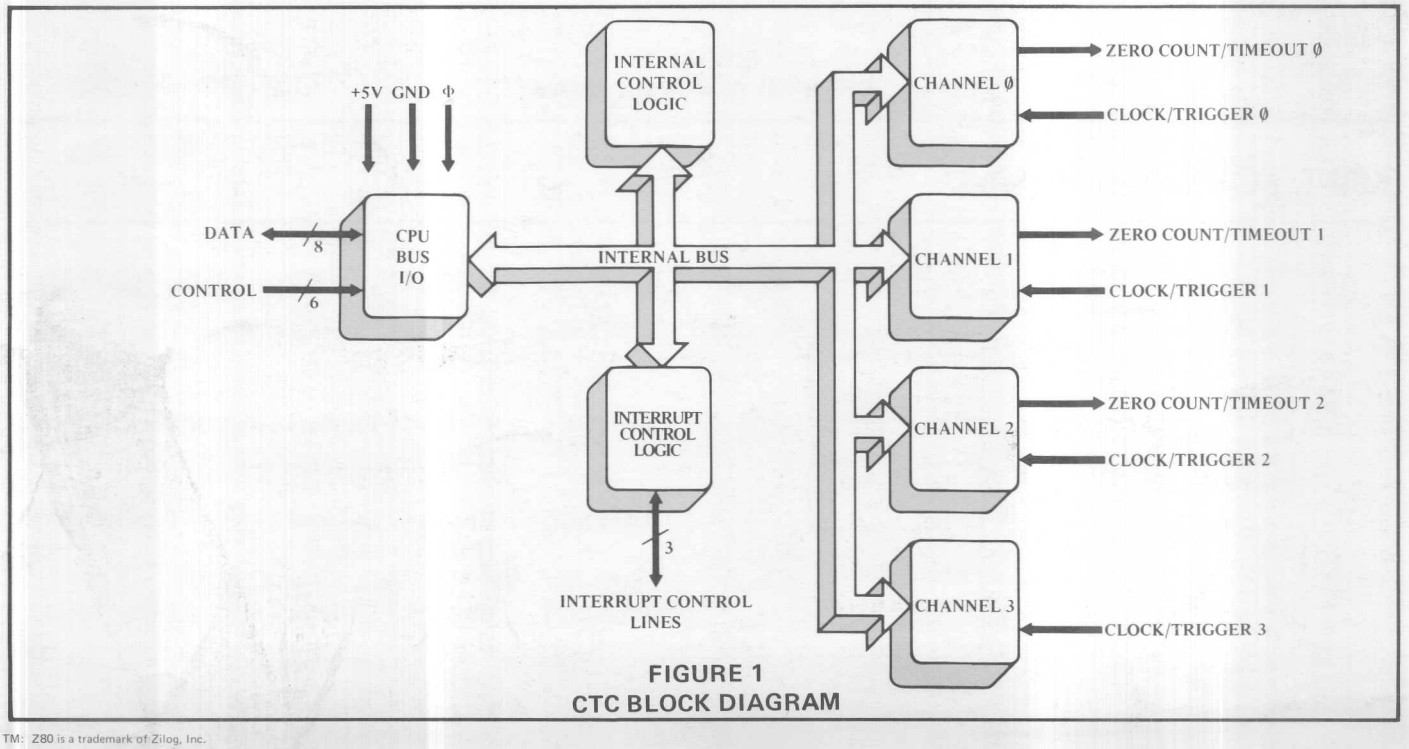

FIGURE 1
CTC BLOCK DIAGRAM

TM: Z80 is a trademark of Zilog, Inc.

Channel Counter and Register Description

Time Constant Register – 8 bits, loaded by the CPU to initialize and re-load Down Counter at a count of zero.

Channel Control Register – 8 bits, loaded by the CPU to select the mode and conditions of channel operation.

Down Counter – 8 bits, loaded by the Time Constant Register under program control and automatically at a count of zero. At any time, the CPU can read the number of counts-to-go until a zero count. This counter is decremented by the prescaler in timer mode and CLK/TRIG in counter mode.

Prescaler – 8 bit counter, divides system clock by 16 or 256 for decrementing Down Counter. It is used in timer mode only.

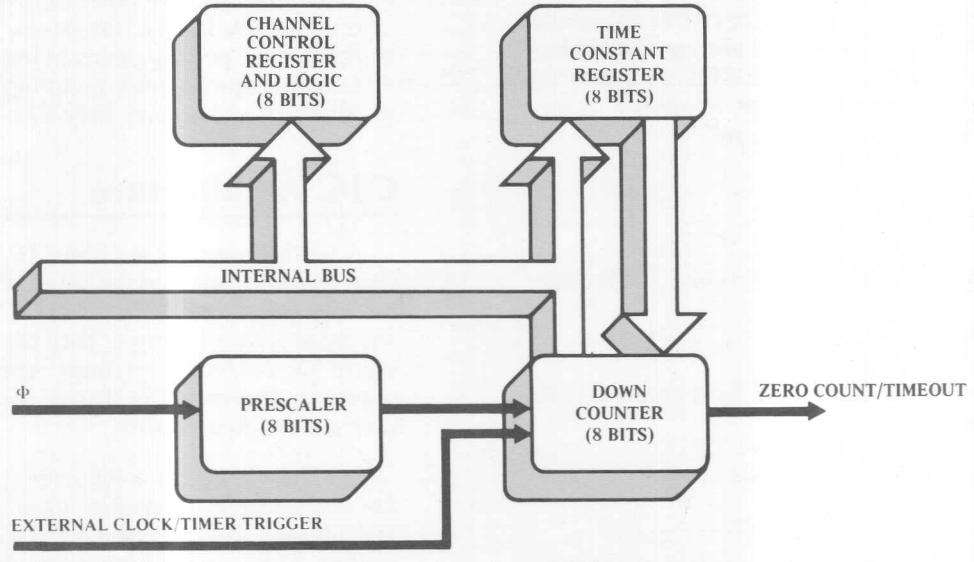

FIGURE 2
CHANNEL BLOCK DIAGRAM

Z80-CTC Pin Description

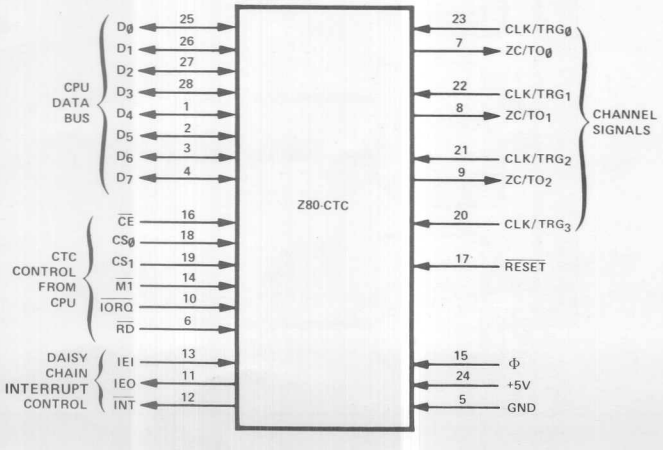

CLK/TRGϕ	Channel ϕ External Clock or Timer Trigger (Input)
CLK/TRG1	Channel 1 External Clock or Timer Trigger (Input)
CLK/TRG2	Channel 2 External Clock or Timer Trigger (Input)
CLK/TRG3	Channel 3 External Clock or Timer Trigger (Input)
ZC/TOϕ	Channel ϕ Zero Count or Timeout (output, active high)

Z80-CTC Pin Description (continued)

ZC/TO_1	Channel 1 Zero Count or Timeout (output, active high)
ZC/TO_2	Channel 2 Zero Count or Timeout (output, active high)
$CS_1 - CS_\emptyset$	Channel Select (input, active high). These form a 2-bit binary address of the channel to be accessed.
$D7 - D_\emptyset$	Z80-CPU Data Bus (bidirectional, tristate)
$\overline{CE}$	Chip Enable (input, active low)
Φ	System Clock (input)
$\overline{M1}$	Machine Cycle One Signal from Z80-CPU (input, active low)
$\overline{IORQ}$	Input/Output Request from Z80-CPU (input, active low)
$\overline{RD}$	Read Cycle Status from the Z80-CPU (input, active low)
IEI	Interrupt Enable In (input, active high)
IEO	Interrupt Enable Out (output, active high). IEI and IEO form a daisy chain connection for priority interrupt control
$\overline{INT}$	Interrupt Request (output, open drain, active low)
$\overline{RESET}$	RESET stops all channels from counting and resets channel interrupt enable bits in all control registers. During reset time $ZC/TO_{\emptyset-2}$ and $\overline{INT}$ go to the inactive states, IEO reflects the state of IEI, and the data bus output drivers go to the high impedance state (input, active low)

Timing Waveforms

CTC WRITE CYCLE

Illustrated here is the timing for loading a channel control word, time constant and interrupt vector. No wait states are allowed for writing to the CTC other than the automatically inserted (T_W*). Since the CTC does not receive a specific write signal, it internally generates its own from the lack of an $\overline{RD}$ signal.

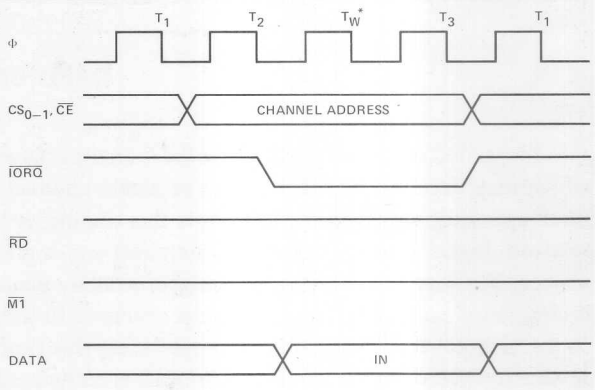

CTC READ CYCLE

Illustrated here is the timing for reading a channel's Down Counter when in Counter Mode. The value read onto the data bus reflects the number of external clock's rising edges prior to the rising edge of cycle (T_2). No wait states are allowed for reading the CTC other than the automatically inserted (T_W*).

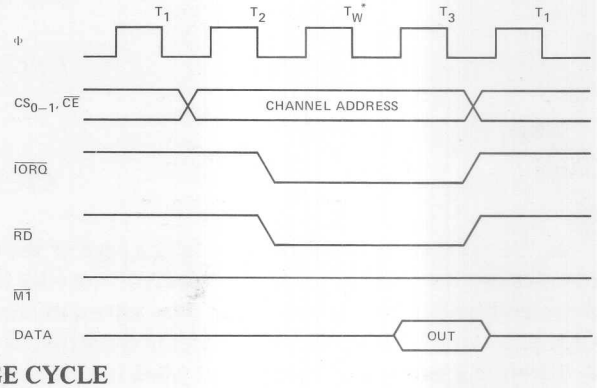

INTERRUPT ACKNOWLEDGE CYCLE

Some time after an interrupt is requested by the CTC, the CPU will send out an interrupt acknowledge ($\overline{M1}$ and $\overline{IORQ}$). During this time the interrupt logic of the CTC will determine the highest priority channel which is requesting an interrupt. To insure that the daisy chain enable lines stabilize, channels are inhibited from changing their interrupt request status when $\overline{M1}$ is active. If the CTC Interrupt Enable Input (IEI) is active, then the highest priority interrupting channel places the contents of its interrupt vector register onto the Data Bus when $\overline{IORQ}$ goes active. Additional wait cycles are allowed.

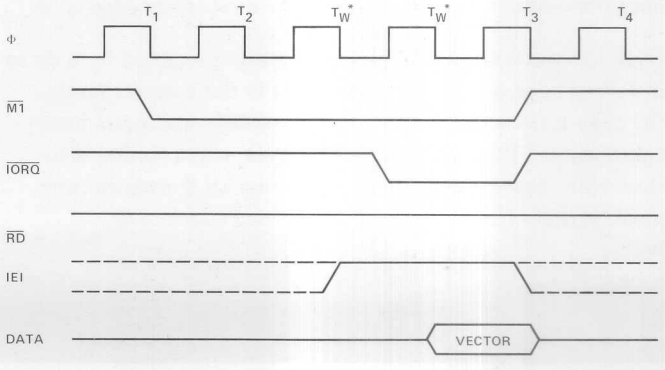

RETURN FROM INTERRUPT CYCLE

If a Z80 peripheral device has no interrupt pending and is not under service, then its IEO = IEI. If it has an interrupt under service (i.e. it has already interrupted and received an interrupt acknowledge) then its IEO is always low, inhibiting lower priority chips from interrupting. If it has an interrupt pending which has not yet been acknowledged, IEO will be low unless an "ED" is decoded as the first byte of a two byte opcode. In this case, IEO will go high until the next opcode byte is decoded, whereupon it will again go low. If the second byte of the opcode was a "4D" then the opcode was an RETI instruction.

After an "ED" opcode is decoded, only the peripheral device which has interrupted and is currently under service will have its IEI high and its IEO low. This device is the highest priority device in the daisy chain which has received an interrupt acknowledge. All other peripherals have IEI = IEO. If the next opcode byte decoded is "4D", this peripheral device will reset its "interrupt under service" condition.

Wait cycles are allowed in the $\overline{M1}$ cycles.

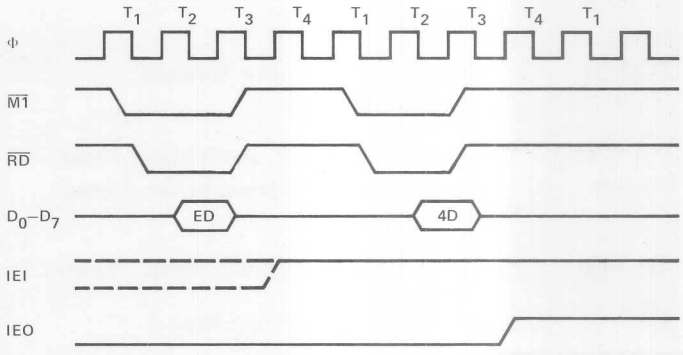

DAISY CHAIN INTERRUPT SERVICING

Illustrated at right is a typical nested interrupt sequence which may occur in the CTC. In this sequence channel 2 interrupts and is granted service. While this channel is being serviced, higher priority channel 1 interrupts and is granted service. The service routine for the higher priority channel is completed and a RETI instruction is executed to indicate to the channel that its routine is complete. At this time the service routine of lower priority channel 2 is completed.

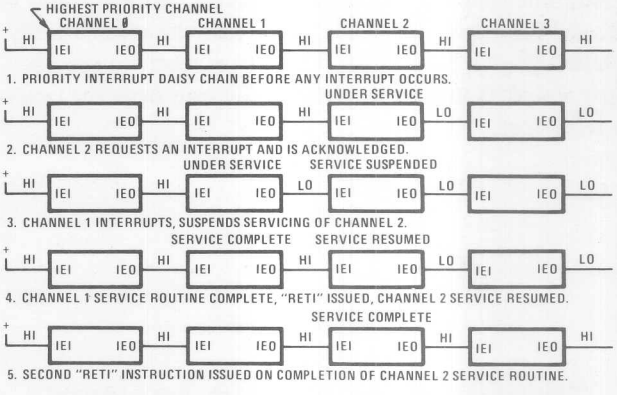

CTC COUNTING AND TIMING

In the counter mode the rising or falling edge of the CLK input causes the counter to be decremented. The edge is detected totally asynchronously and must have a minimum CLK pulse width. However, the counter is synchronous with Φ therefore a setup time must be met when it is desired to have the counter decremented by the next rising edge of Φ.

In the timer mode the prescaler may be enabled by a rising or falling edge on the TRG input. As in the counter mode, the edge is detected totally asynchronously and must have a minimum TRG pulse width. However, when timing is to start with respect to the next rising edge of Φ a setup time must be met. The prescaler counts rising edges of Φ.

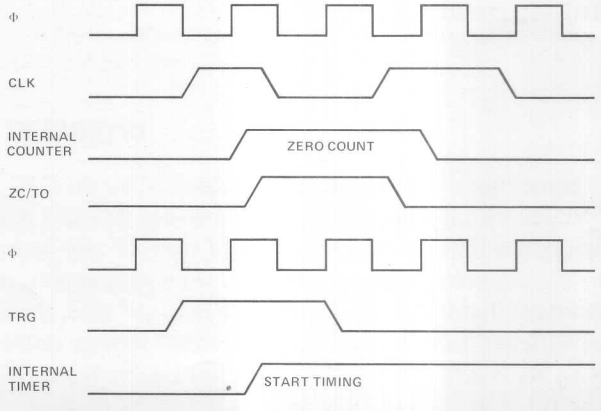

CTC Programming

SELECTING AN OPERATING MODE

When selecting a channel's operating mode, bit Ø is set to 1 to indicate this word is to be stored in the channel control register.

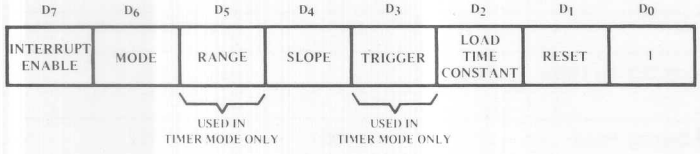

Bit 7 = Ø — Channel interrupts disabled.

Bit 7 = 1 — Channel interrupts enabled to occur every time Down Counter reaches a count of zero. Setting Bit 7 does not let a preceding count of zero cause an interrupt.

Bit 6 = Ø — Timer Mode – Down counter is clocked by the prescaler. The period of the counter is:
$t_C \bullet P \bullet TC$
t_C = system clock period
P = prescale of 16 or 256
TC = 8 bit binary programmable time constant (256 max)

Bit 6 = 1 — Counter Mode – Down Counter is clocked by external clock. The prescaler is not used.

Bit 5 = Ø — Timer Mode Only–System clock Φ is divided by 16 in prescaler.

Bit 5 = 1 — Timer Mode Only–System clock Φ is divided by 256 in prescaler.

Bit 4 = Ø — Timer Mode – negative edge trigger starts timer operation.
Counter Mode – negative edge decrements the down counter.

Bit 4 = 1 — Timer Mode – positive edge trigger starts timer operation.
Counter Mode – positive edge decrements the down counter.

Bit 3 = Ø — Timer Mode Only – Timer begins operation on the rising edge of T_2 of the machine cycle following the one that loads the time constant.

Bit 3 = 1 — Timer Mode Only – External trigger is valid for starting timer operation after rising edge of T_2 of the machine cycle following the one that loads the time constant. The Prescaler is decremented 2 clock cycles later if the setup time is met, otherwise 3 clock cycles.

Bit 2 = Ø — No time constant will follow the channel control word. One time constant must be written to the channel to initiate operation.

Bit 2 = 1 — The time constant for the Down Counter will be the next word written to the selected channel. If a time constant is loaded while a channel is counting, the present count will be completed before the new time constant is loaded into the Down Counter.

Bit 1 = Ø — Channel continues counting.

Bit 1 = 1 — Stop operation. If Bit 2 = 1 channel will resume operation after loading a time constant, otherwise a new control word must be loaded.

LOADING A TIME CONSTANT

An 8-bit time constant is loaded into the Time Constant register following a channel control word with bit 2 set. All zeros indicate a time constant of 256.



LOADING AN INTERRUPT VECTOR

The Z80-CPU requires that an 8-bit interrupt vector be supplied by the interrupting channel. The CPU forms the address for the interrupt service routine of the channel using this vector. During an interrupt acknowledge cycle the vector is placed on the Z80 Data Bus by the highest priority channel requesting service at that time. The desired interrupt vector is loaded into the CTC by writing into channel Ø with a zero in DØ. D7-D3 contain the stored interrupt vector, D_2 and D_1 are not used in loading the vector. When the CTC responds to an interrupt acknowledge, these two bits contain the binary code of the highest priority channel which requested the interrupt and DØ contains a zero since the address of the interrupt service routine starts at an even byte. Channel Ø is the highest priority channel.



TA = 0° C to 70° C, Vcc = +5 V ± 5%, unless otherwise noted

Signal	Symbol	Parameter	Min	Max	Unit	Comments
Φ	t_C	Clock Period	400	[1]	ns	
	$t_W(\Phi H)$	Clock Pulse Width, Clock High	170	2000	ns	
	$t_W(\Phi L)$	Clock Pulse Width, Clock Low	170	2000	ns	
	t_r, t_f	Clock Rise and Fall Times		30	ns	
	t_H	Any Hold Time for Specified Setup Time	0		ns	
CS, $\overline{CE}$, etc.	$t_{S\Phi}(CS)$	Control Signal Setup Time to Rising Edge of Φ During Read or Write Cycle	160		ns	
D_0–D_7	$t_{DR}(D)$	Data Output Delay from Rising Edge of $\overline{RD}$ During Read Cycle		480	ns	[2]
	$t_{S\Phi}(D)$	Data Setup Time to Rising Edge of Φ During Write or M1 Cycle	60		ns	
	$t_{DI}(D)$	Data Output Delay from Falling Edge of IORQ During INTA Cycle		340	ns	[2]
	$t_F(D)$	Delay to Floating Bus (Output Buffer Disable Time)		230	ns	
IEI	$t_S(IEI)$	IEI Setup Time to Falling Edge of $\overline{IORQ}$ During INTA Cycle	200		ns	
IEO	$t_{DH}(IO)$	IEO Delay Time from Rising Edge of IEI		220	ns	[3]
	$t_{DL}(IO)$	IEO Delay Time from Falling Edge of IEI		190	ns	[3]
	$t_{DM}(IO)$	IEO Delay from Falling Edge of $\overline{M1}$ (Interrupt Occurring just Prior to $\overline{M1}$)		300	ns	[3]
$\overline{IORQ}$	$t_{S\Phi}(IR)$	$\overline{IORQ}$ Setup Time to Rising Edge of Φ During Read or Write Cycle	250		ns	
$\overline{M1}$	$t_{S\Phi}(M1)$	$\overline{M1}$ Setup Time to Rising Edge of Φ During INTA or M1 Cycle	210		ns	
$\overline{RD}$	$t_{S\Phi}(RD)$	$\overline{RD}$ Setup Time to Rising Edge of Φ During Read or M1 Cycle	240		ns	
$\overline{INT}$	$t_{DCK}(IT)$	$\overline{INT}$ Delay Time from Rising Edge of CLK/TRG		$2t_C(\Phi)$ + 200		Counter Mode
	$t_{D\Phi}(IT)$	$\overline{INT}$ Delay Time from Rising Edge of Φ		$t_C(\Phi)$ + 200		Timer Mode
CLK/TRG_{0-3}	$t_C(CK)$	Clock Period	$2t_C(\Phi)$			Counter Mode
	t_r, t_f	Clock and Trigger Rise and Fall Times		50		
	$t_S(CK)$	Clock Setup Time to Rising Edge of Φ for Immediate Count	210			Counter Mode
	$t_S(TR)$	Trigger Setup Time to Rising Edge of Φ for Enabling of Prescaler on Following Rising Edge of Φ	210			Timer Mode
	$t_W(CTH)$	Clock and Trigger High Pulse Width	200			Counter and Timer Modes
	$t_W(CTL)$	Clock and Trigger Low Pulse Width	200			Counter and Timer Modes
ZC/TO_{0-2}	$t_{DH}(ZC)$	ZC/TO Delay Time from Rising Edge of Φ, ZC/TO High		190		Counter and Timer Modes
	$t_{DL}(ZC)$	ZC/TO Delay Time from Falling Edge of Φ, ZC/TO Low		190		Counter and Timer Modes

Notes: [1] $t_C = t_W(\Phi H) + t_W(\Phi L) + t_r + t_f$.
[2] Increase delay by 10 nsec for each 50 pF increase in loading, 200 pF maximum for data lines and 100 pF for control lines.
[3] Increase delay by 2 nsec for each 10 pF increase in loading, 100 pF maximum
[4] $\overline{RESET}$ must be active for a minimum of 3 clock cycles.

OUTPUT LOAD CIRCUIT

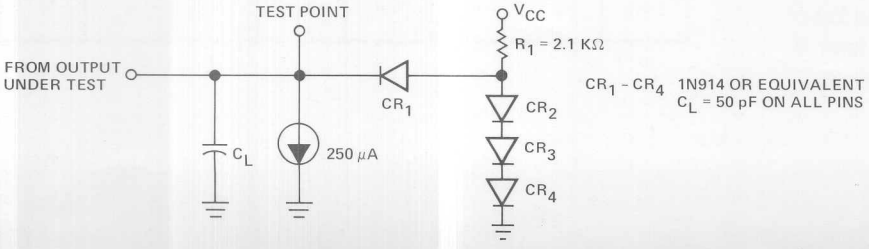

TA = 0° C to 70° C, Vcc = +5 V ± 5%, unless otherwise noted

Signal	Symbol	Parameter	Min	Max	Unit	Comments
Φ	t_C	Clock Period	250	[1]	ns	
	$t_W(\Phi H)$	Clock Pulse Width, Clock High	105	2000	ns	
	$t_W(\Phi L)$	Clock Pulse Width, Clock Low	105	2000	ns	
	t_r, t_f	Clock Rise and Fall Times		30	ns	
	t_H	Any Hold Time for Specified Setup Time	0		ns	
CS, $\overline{CE}$, etc	$t_{S\Phi}(CS)$	Control Signal Setup Time to Rising Edge of Φ During Read or Write Cycle	60		ns	
D_0–D_7	$t_{DR}(D)$	Data Output Delay from Falling Edge of $\overline{RD}$ During Read Cycle		380	ns	[2]
	$t_{S\Phi}(D)$	Data Setup Time to Rising Edge of Φ During Write or M1 Cycle	50		ns	
	$t_{DI}(D)$	Data Output Delay from Falling Edge of IORG During INTA Cycle		160	ns	[2]
	$t_F(D)$	Delay to Floating Bus (Output Buffer Disable Time)		110	ns	
IEI	$t_S(IEI)$	IEI Setup Time to Falling Edge of $\overline{IORQ}$ During INTA Cycle	140		ns	
IEO	$t_{DH}(IO)$	IEO Delay Time from Rising Edge of IEI		160	ns	[3]
	$t_{DL}(IO)$	IEO Delay Time from Falling Edge of IEI		130	ns	[3]
	$t_{DM}(IO)$	IEO Delay from Falling Edge of $\overline{M1}$ (Interrupt Occurring just Prior to $\overline{M1}$)		190	ns	[3]
$\overline{IORQ}$	$t_{S\Phi}(IR)$	$\overline{IORQ}$ Setup Time to Rising Edge of Φ During Read or Write Cycle	115		ns	
$\overline{M1}$	$t_{S\Phi}(M1)$	$\overline{M1}$ Setup Time to Rising Edge of Φ During INTA or M1 Cycle	90		ns	
$\overline{RD}$	$t_{S\Phi}(RD)$	$\overline{RD}$ Setup Time to Rising Edge of Φ During Read or M1 Cycle	115		ns	
$\overline{INT}$	$t_{DCK}(IT)$	$\overline{INT}$ Delay Time from Rising Edge of CLK/TRG		$2t_C(\Phi) + 140$		Counter Mode
	$t_{D\Phi}(IT)$	$\overline{INT}$ Delay Time from Rising Edge of Φ		$t_C(\Phi) + 140$		Timer Mode
CLK/TRG_{0-3}	$t_C(CK)$	Clock Period	$2t_C(\Phi)$			Counter Mode
	t_r, t_f	Clock and Trigger Rise and Fall Times		30		
	$t_S(CK)$	Clock Setup Time to Rising Edge of Φ for Immediate Count	130			Counter Mode
	$t_S(TR)$	Trigger Setup Time to Rising Edge of Φ for enabling of Prescaler on Following Rising Edge of Φ	130			Timer Mode
	$t_W(CTH)$	Clock and Trigger High Pulse Width	120			Counter and Timer Modes
	$t_W(CTL)$	Clock and Trigger Low Pulse Width	120			Counter and Timer Modes
ZC/TO_{0-2}	$t_{DH}(ZC)$	ZC/TO Delay Time from Rising Edge of Φ, ZC/TO High		120		Counter and Timer Modes
	$t_{DL}(ZC)$	ZC/TO Delay Time from Rising Edge of Φ, ZC/TO Low		120		Counter and Timer Modes

Notes: [1] $t_C = t_W(\Phi H) + t_W(\Phi L) + t_r + t_f$.
[2] Increase delay by 10 nsec for each 50 pF increase in loading, 200 pF maximum for data lines and 100 pF for control lines.
[3] Increase delay by 2 nsec for each 10 pF increase in loading, 100 pF maximum.
[4] $\overline{RESET}$ must be active for a minimum of 3 clock cycles.

OUTPUT LOAD CIRCUIT

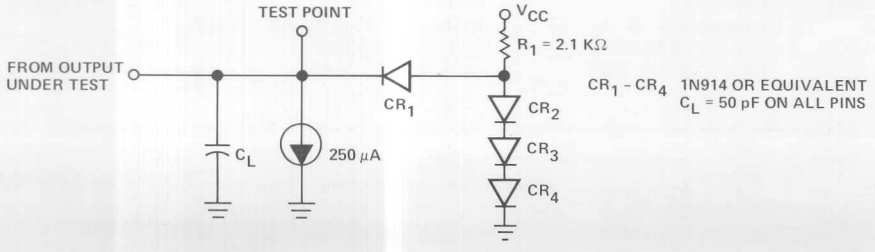

Absolute Maximum Ratings

Temperature Under Bias	0° C to 70° C
Storage Temperature	-65° C to +150° C
Voltage On Any Pin With Respect To Ground	-0.3 V to +7 V
Power Dissipation	0.8W

***Comment**

Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other condition above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

D.C. Characteristics

TA = 0° C to 70° C, Vcc = 5 V ± 5% unless otherwise specified

Z80-CTC

Symbol	Parameter	Min	Max	Unit	Test Condition
V_{ILC}	Clock Input Low Voltage	-0.3	.45	V	
V_{IHC}	Clock Input High Voltage [1]	V_{CC} - .6	V_{CC} + .3	V	
V_{IL}	Input Low Voltage	-0.3	0.8	V	
V_{IH}	Input High Voltage	2.0	V_{CC}	V	
V_{OL}	Output Low Voltage		0.4	V	I_{OL} = 2 mA
V_{OH}	Output High Voltage	2.4		V	I_{OH} = -250 μA
I_{CC}	Power Supply Current		120	mA	T_C = 400 nsec
I_{LI}	Input Leakage Current		10	μA	V_{IN} = 0 to V_{CC}
I_{LOH}	Tri-State Output Leakage Current in Float		10	μA	V_{OUT} = 2.4 to V_{CC}
I_{LOL}	Tri-State Output Leakage Current in Float		-10	μA	V_{OUT} = 0.4V
I_{OHD}	Darlington Drive Current	-1.5		mA	V_{OH} = 1.5V R_{EXT} = 390Ω

Z80A-CTC

Symbol	Parameter	Min	Max	Unit	Test Condition
V_{ILC}	Clock Input Low Voltage	-0.3	.45	V	
V_{IHC}	Clock Input High Voltage [1]	V_{CC} - .6	V_{CC} + .3	V	
V_{IL}	Input Low Voltage	-0.3	0.8	V	
V_{IH}	Input High Voltage	2.0	V_{CC}	V	
V_{OL}	Output Low Voltage		0.4	V	I_{OL} = 2 mA
V_{OH}	Output High Voltage	2.4		V	I_{OH} = -250 μA
I_{CC}	Power Supply Current		120	mA	T_C = 250 nsec
I_{LI}	Input Leakage Current		10	μA	V_{IN} = 0 to V_{CC}
I_{LOH}	Tri-State Output Leakage Current in Float		10	μA	V_{OUT} = 2.4 to V_{CC}
I_{LOL}	Tri-State Output Leakage Current in Float		-10	μA	V_{OUT} = 0.4V
I_{OHD}	Darlington Drive Current	-1.5		mA	V_{OH} = 1.5V R_{EXT} = 390Ω

Capacitance

TA = 25° C, f = 1 MHz

Symbol	Parameter	Max.	Unit	Test Condition
C_Φ	Clock Capacitance	20	pF	Unmeasured Pins Returned to Ground
C_{IN}	Input Capacitance	5	pF	
C_{OUT}	Output Capacitance	10	pF	

A.C. Timing Diagram

Timing measurements are made at the following voltages, unless otherwise specified:

	"1"	"0"
CLOCK	V_{CC} - .6V	.45V
OUTPUT	2.0V	.8V
INPUT	2.0V	.8V
FLOAT	ΔV	±0.5V

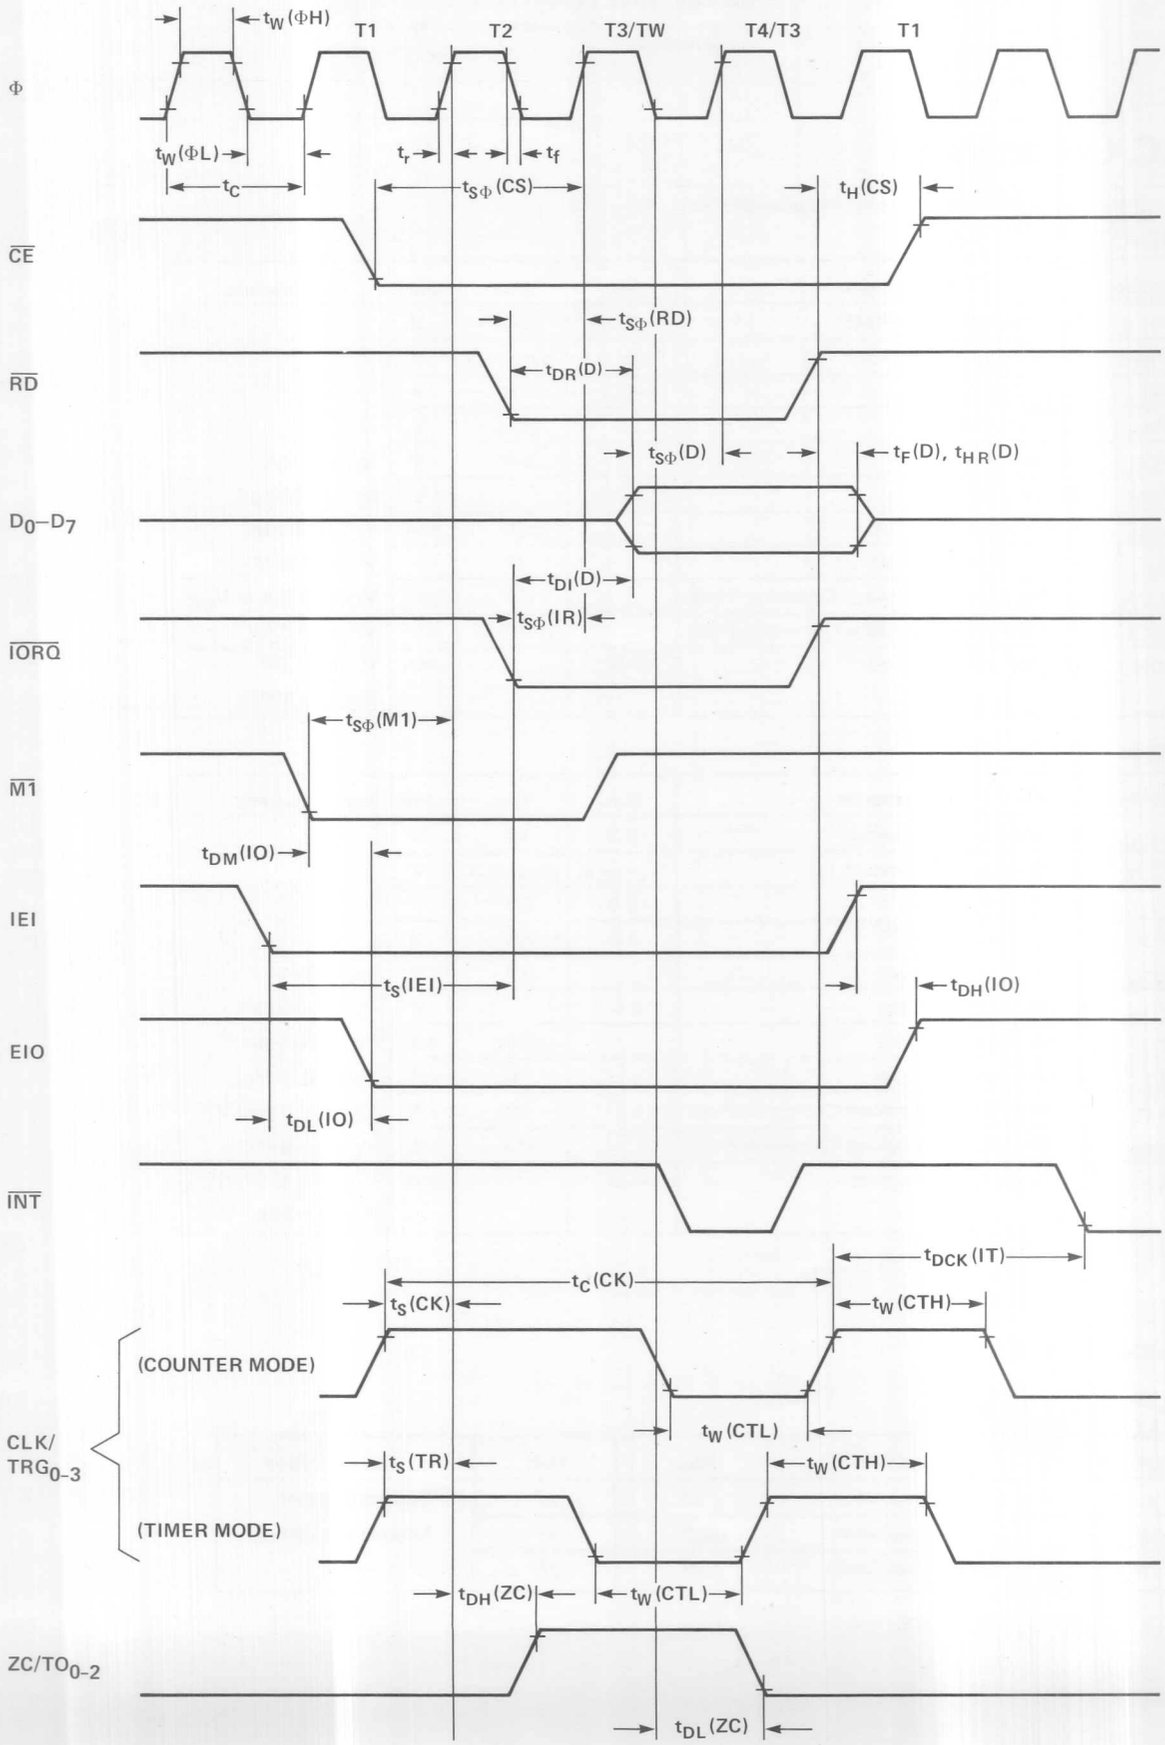

Package Configuration

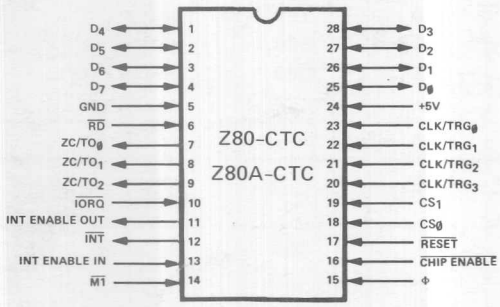

Package Outline

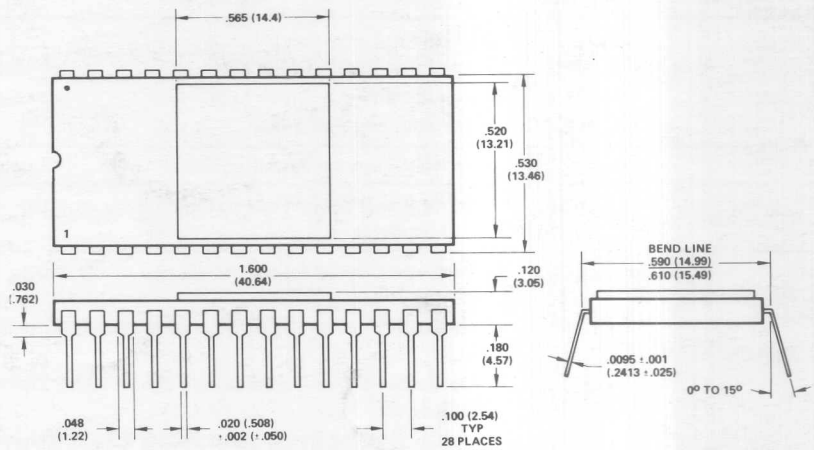

* DIMENSIONS FOR METRIC SYSTEM IN PARENTHESES (mm)

ZILOG U.S. DISTRIBUTORS

EASTERN

Hallmark Electronics
4739 Commercial Drive
Huntsville, AL 35805
TEL 205 837 8700
TWX 810 726 2187

Hallmark Electronics
1302 West McNab Road
Fort Lauderdale, FL 33309
TEL 305 971 9280
TWX 510 956 9720

Hallmark Electronics
7233 Lake Ellenor Drive
Orlando, FL 32809
TEL 305 855 3020
TWX 810 850 0183

Hallmark Electronics
3355 Amberton Drive
Baltimore MD 21227
TEL 301 796 9300
TWX 710 862 1942

Hallmark Electronics
1208 Front Street
Building K
Raleigh, NC 27609
TEL 919 832 4465
TWX 510 928 1831

Hallmark Electronics
Pike Industrial Park
Huntington Valley, PA
TEL 215 355 7300
TWX 510 667 1750

Summit
916 Main Street
Buffalo, NY 14202
TEL 716 884 3450

Wilshire Electronics
2554 State Street
Hamden, CT 06517
TEL 203 281 1166
TWX 800 922 1734

Wilshire Electronics
1855 New Highway
Farmingdale, LI, NY 11735
TEL 516 293 5775
TWX 212 895 8707

Wilshire Electronics
One Wilshire Road
Burlington, MA 01803
TEL 617 272 8200
TWX 710 332 6359

Wilshire Electronics
1111 Paulison Avenue
Clifton, NJ 07015
TEL 201 340 1900
TWX 710 989 7052

MIDWESTERN

Hallmark Electronics
180 Grossen Avenue
Elk Grove Village, IL 60076
TEL 312 437 8800
TWX 910 223 3645

Hallmark Electronics
11870 West 91st Street
Congleton Industrial Park
Shawnee Mission, KS 66214
TEL 913 888 4747
TWX 910 749 6620

Hallmark Electronics
9201 Penn Avenue South
Suite 10
Bloomington, MN 55435
TEL 612 884 9056
TWX 910 576 3187

Hallmark Electronics
13789 Rider Trail
Earth City, MO 63045
TEL 314 291 5350
TWX 910 760 0671

Hallmark Electronics
6969 Worthington Galena Road
Worthington, OH 43085
TEL 614 846 1882

Hallmark Electronics
4846 S. 83rd E. Avenue
Tulsa, OK 74145
TEL 918 835 8458
TWX 910 845 2290

Hallmark Electronics
3100–A Industrial Terrace
Austin, TX 78758
TEL 512 837 2841
TWX 910 874 2031

Hallmark Electronics
9333 Forest Lane
Dallas, TX 75222
TEL 214 234-7400
TWX 910 867 4721

Hallmark Electronics
8000 W. Glenn
Houston, TX 77063
TEL 713 781 6100
TWX 910 881 2711

Hallmark Electronics
237 South Curtis
West Allis, WI 53214
TEL 414 476 1270
TWX 910 262 3186

RM Electronics
4860 South Division
Kentwood, MI 49508
TEL 616 531 9300
TWX 810 273 8779

MOUNTAIN

Century Electronics
121 Elizabeth, NE
Albuquerque, NM 87123
TEL 505 292 2700
TWX 910 989 0625

Century Electronics
2150 South 300 West
Salt Lake City, UT 84115
TEL 801 487 8551
TWX 910 925 5686

Century Electronics
8155 West 48th Avenue
Wheatridge, CO 80033
TEL 303 424 1985
TWX 910 938 0393

R. V. Weatherford Co.
3905 South Mariposa
Englewood, CO 80110
TEL 303 761 5432
TWX 910 933 0173

WESTERN

Intermark Electronics
1802 E. Carnegie Avenue
Santa Ana, CA 92705
TEL 714 540 1322
TWX 910 595 1583

Intermark Electronics
4040 Sorrento Valley Blvd.
San Diego, CA 92121
TEL 714 279 5200
714 453 9005
TWX 910 335 1515

Intermark Electronics
1020 Stewart Drive
Sunnyvale, CA 94086
TEL 408 738 1111
TWX 910 339 9312

R.V. Weatherford Co.
6921 San Fernando Road
Glendale, CA 91201
TEL 213 849 3451
TWX 910 498 2223

R.V. Weatherford Co.
1550 Babbitt Avenue
Anaheim, CA 92805
TEL 714 634 9600
TWX 910 593 1334

R.V. Weatherford Co.
1095 East Third Street
Pomona, CA 91765
TEL 714 623 1261
TWX 910 581 3811

R.V. Weatherford Co.
3240 Hillview Avenue
Stanford Industrial Park
Palo Alto, CA 94304
TEL 415 493 5373

R.V. Weatherford Co.
3311 W. Earll Drive
Phoenix, AZ 85017
TEL 602 272 7144
TWX 910 951 0636

Sterling Electronics
5608 6th Avenue South
Seattle, WA 98108
TEL 206 762 9100
TLX 32-9652

CANADA

Future Electronics
5647 Ferrier Street
Montreal, Quebec,
CANADA H4P 2K5

ZILOG SALES OFFICES

NORTHEASTERN REGION

Zilog, Inc.
P.O. Box R
Carlisle, MA 01741
TEL 617 667 2179
TWX 710 347 6660

EASTERN REGION

Zilog, Inc.
P.O. Box 92
Bergenfield, NJ 07625
TEL 201 385 9158

MIDWESTERN REGION

Zilog, Inc.
1701 Woodfield Place
Suite 417
Schaumburg, IL 60195
TEL 312 885 8080
TWX 910 291 1064

WESTERN REGION

Zilog, Inc.
17982 Sky Park Circle
Suite C
Irvine, CA 92714
TEL 714 549 2891
TWX 910 595 2803

EUROPEAN HDQTS

Zilog (UK) Ltd.
Nicholson House
Maidenhead, Berkshire
England
TEL (0628) 36131/2/3
TWX 848 609

10460 Bubb Road, Cupertino, California 95014

Zilog

Telephone: (408) 446-4666 TWX: 910-338-7621

03-0031-01

Printed in U.S.A.